




PROJ. NO.:	16-137
DRAWN:	RAR 6-7-16
CHKD:	
REV 1:	
REV 2:	
REV 3:	
REV 4:	
SHOP DWG NO.:	
EEO JOB NO.:	11631
SHEET NO.:	

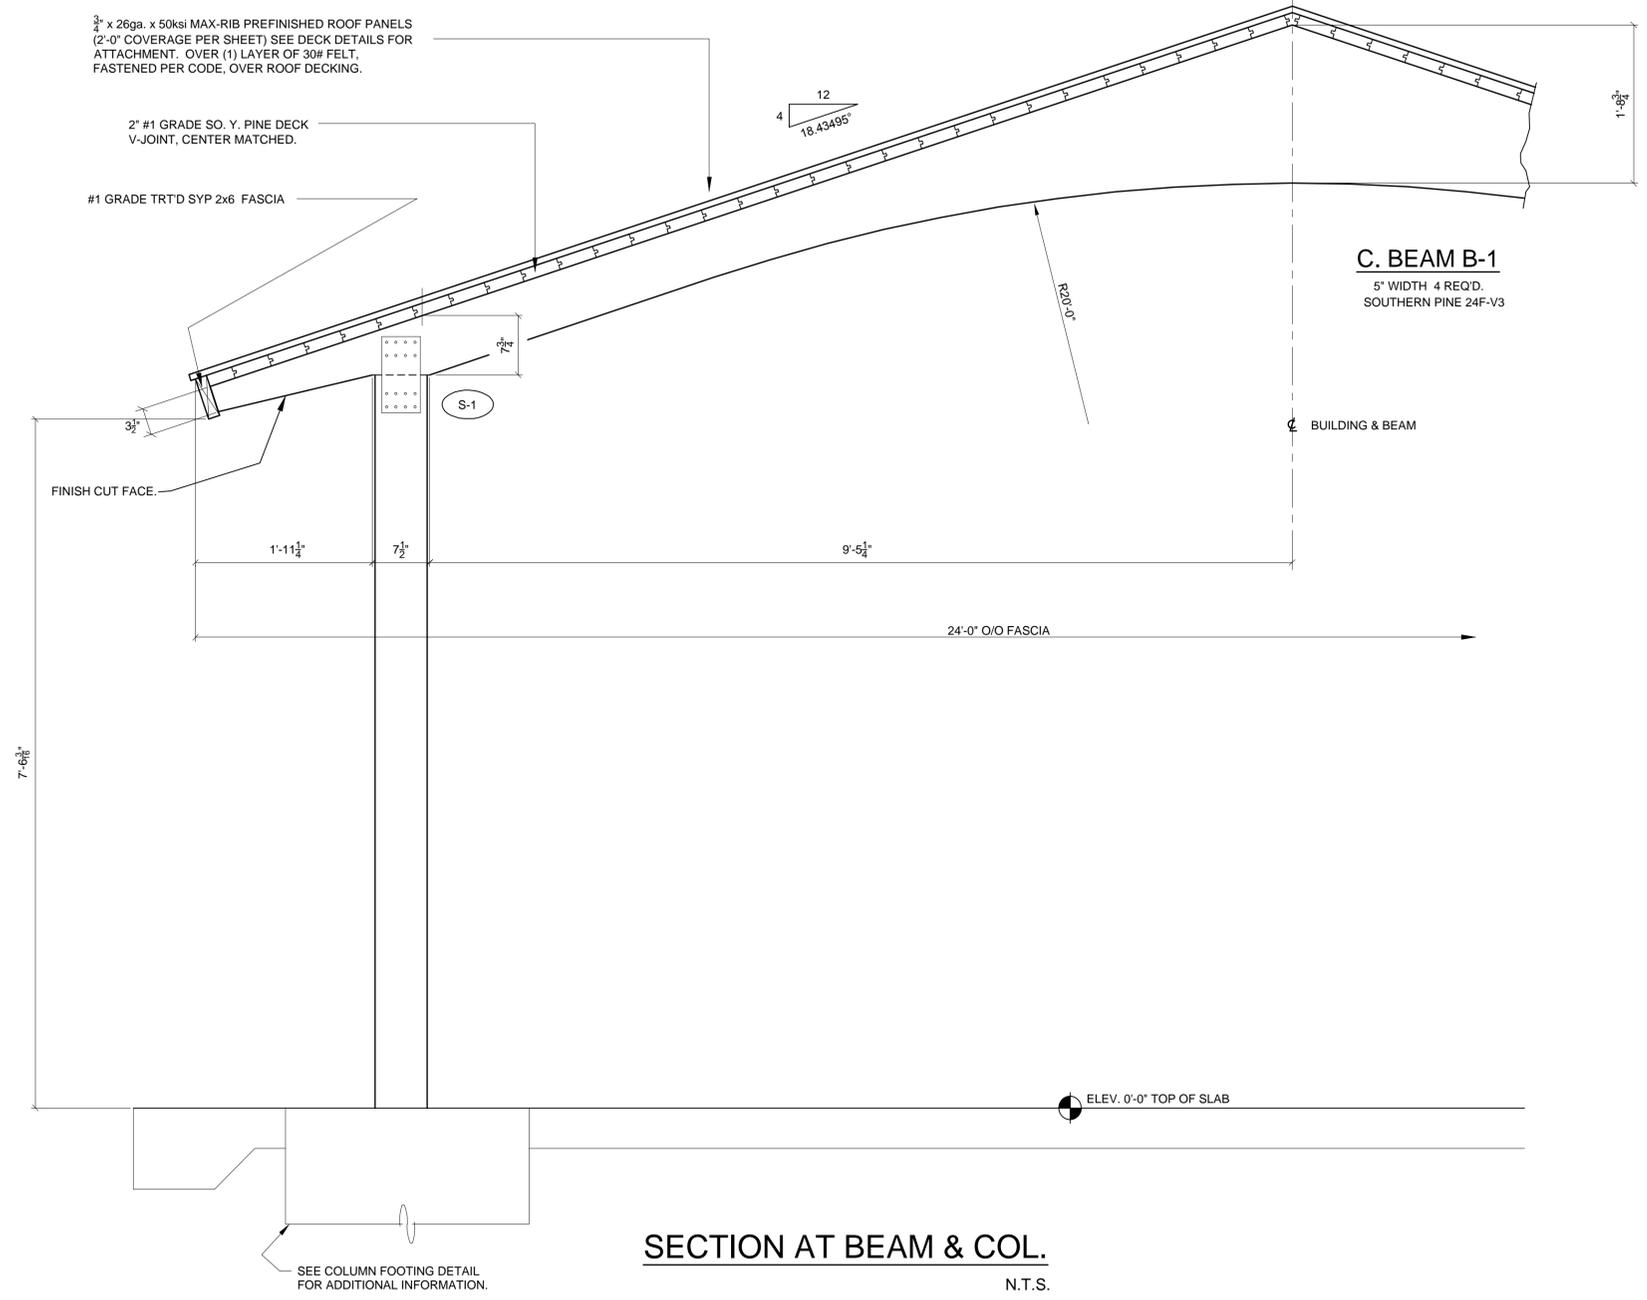





**UNLOADING, HANDLING, & STORAGE OF GLU-LAM & DECKING**

LAMINATED MEMBERS ARE WRAPPED FOR PROTECTION IN TRANSIT. THE ERECTOR IS RESPONSIBLE FOR PROTECTION OF MATERIALS AT ALL TIMES AFTER ARRIVAL AT DESTINATION. IF STORED TEMPORARILY, MEMBERS SHOULD BE PLACED ON BLOCKS & LEVELED, WELL OFF OF THE GROUND & SEPARATED WITH WOOD STRIPS SO THAT AIR CAN CIRCULATE AROUND EACH MEMBER. COVER THE TOP & SIDES WITH MOISTURE RESISTANT PAPER OR OPAQUE PLASTIC. USE NON-MARRING SLINGS WHEN HANDLING. ROOF COVERING SHOULD BE APPLIED SOON AFTER ERECTION. PROTECTIVE WRAPPING SHOULD REMAIN ON THE MEMBERS UNTIL DECK HAS BEEN INSTALLED & ROOFING APPLIED. HOWEVER, IF THE PAPER HAS BEEN TORN OR PARTIALLY REMOVED DURING STORAGE OR ERECTION, IT SHOULD BE REPLACED OR ENTIRELY REMOVED TO PREVENT DISCOLORATION OF LAM MEMBERS BY SUNLIGHT.


LAMINATED MEMBERS RECEIVE ONE FACTORY APPLIED COAT OF CLEAR WOOD SEALER. (FACTORY STAIN IS OPTIONAL AT EXTRA COST). IF THEY SHOULD BECOME WET DURING SHIPMENT OR INSTALLATION, OR IF THEY ARE CLEANED IN ANY WAY, THESE LAMINATED MEMBERS SHOULD BE UNIFORMLY RESEALED BEFORE ADDITIONAL STAINING OR FINISHING IS DONE IN THE FIELD.

DECKING WILL BE DELIVERED IN BANDED BUNDLES, WEIGHING APPROXIMATELY ONE TON. BUNDLES SHOULD REMAIN BANDED UNTIL DECK IS TO BE INSTALLED. A FORKLIFT OR SMALL CRANE WILL BE REQUIRED FOR UNLOADING. BE SURE TO USE NON-MARRING SLINGS.

IT IS THE ERECTOR'S RESPONSIBILITY TO TALLY THE DECKING UPON ARRIVAL. NOTIFY MANUFACTURER AT ONCE OF ANY SHORTAGES.

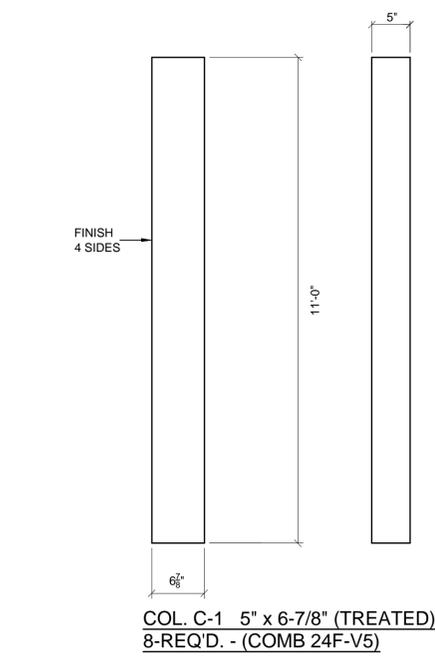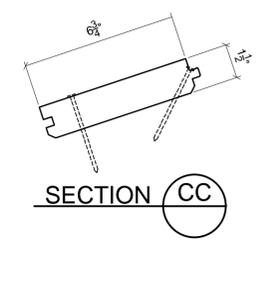
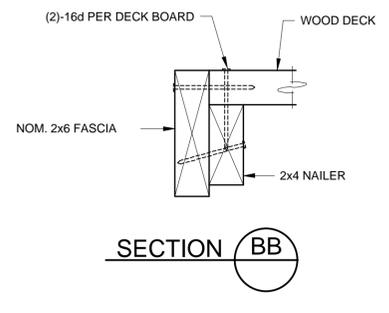
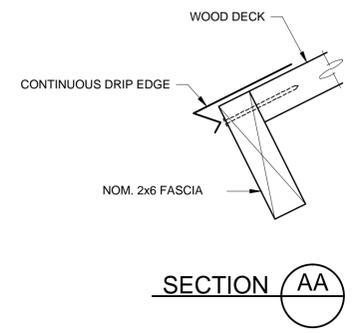


**ERECTOR NOTE:**  
DRILL 5/32" Ø PILOT HOLES IN WOOD MEMBERS FOR NAILS.

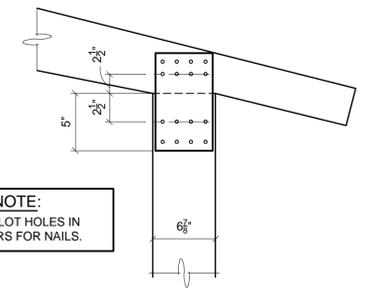

- CONN S-1 8-req'd.**
- 2 - MK-1 PLATE (SP000005x010C00.2500)
  - 32 - 4 GA. x 2 1/2" ANNULAR RING NAIL, SS.

**FASCIA LAY-UP**  
AT EAVE 12'/8"/12"  
AT RAKE 14".

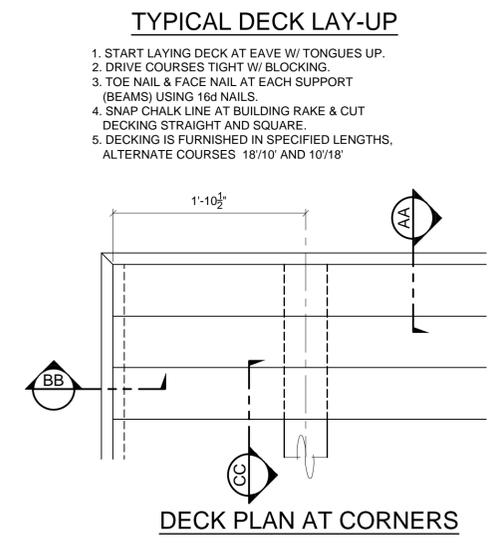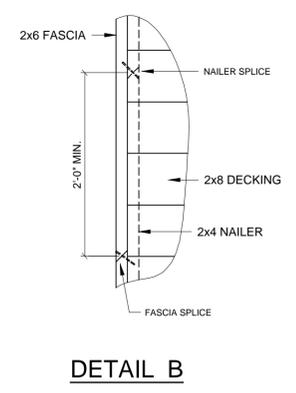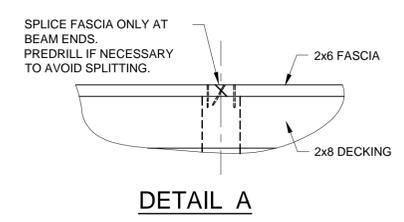

- FASCIA NOTES:**
- ALL FASCIA CORNERS AND SPLICES ARE TO BE MITERED.
  - SEE DETAILS A & B FOR SPLICE DETAILS.
  - ATTACH FASCIA WITH 10d HDG CASING NAILS:
    - a. TO 2x4 NAILER - 24" O.C.
    - b. TO BEAM ENDS - 3 NAILS PER FASCIA
    - c. TO ENDS OF ROOF DECKING - 1 NAIL PER DECK BOARD
    - d. AT CORNERS - 2 NAILS EACH DIRECTION
    - e. OTHER LOCATIONS - 24" O.C. TO ROOF DECKING

- 2 x 4 NAILER**
- MITER ALL SPLICES
  - NAIL SPLICES TOGETHER WITH (2) 10d HDG CASING NAILS. DRIVE NAILS AT AN ANGLE TO AVOID PUNCHING THRU FASCIA.