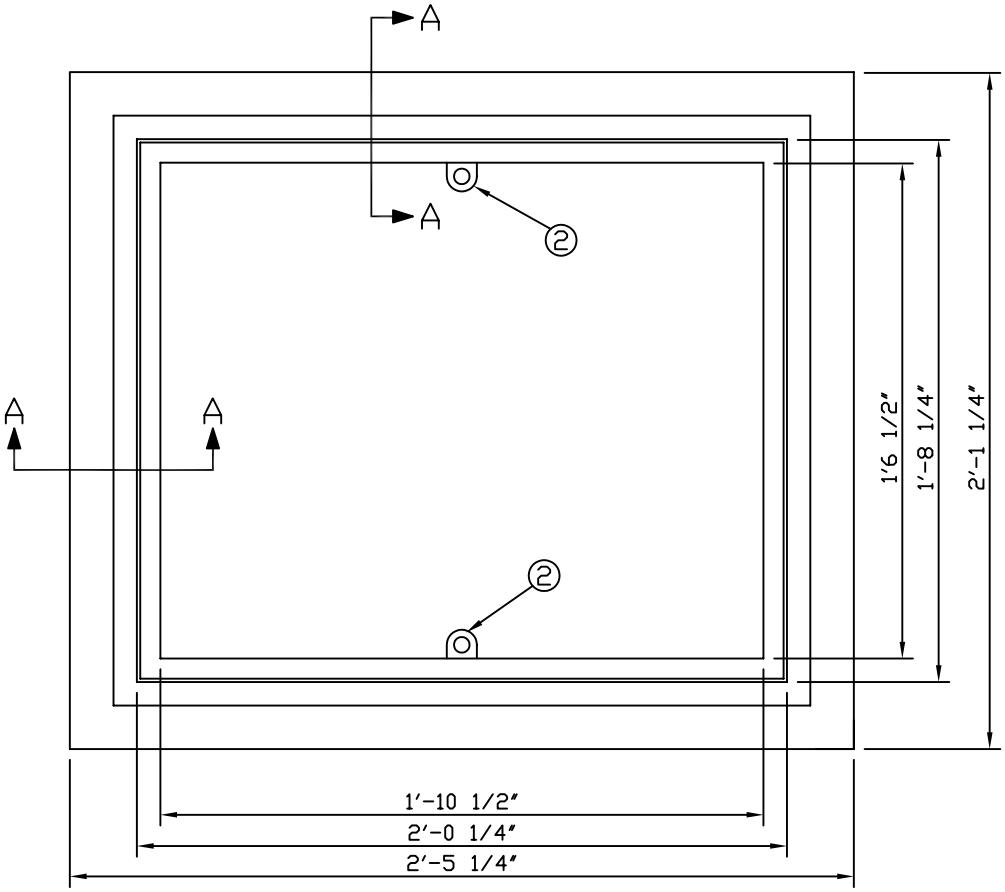

TOP VIEW

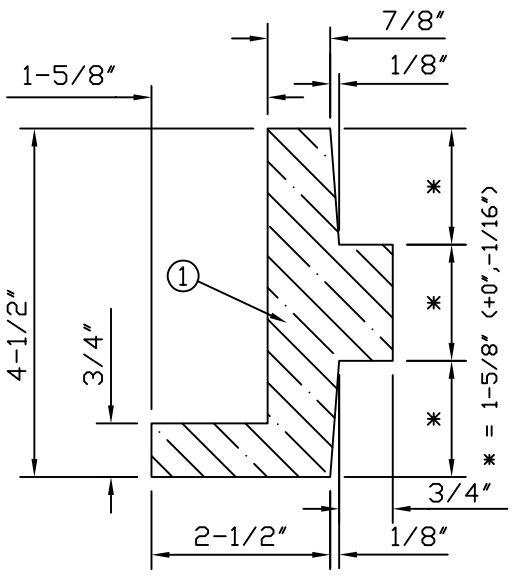

NOTES:

1. MATERIAL USED SHALL BE CAST IRON PER ASTM-A48, CLASS 30. FRAME SHALL HAVE A BITUMINOUS COATING APPLIED.
2. WHEN A LOCKING GRATE OR COVER IS REQUIRED THE FRAME SHALL BE FABRICATED SO AS TO ACCEPT TWO (2) 5/8" STAINLESS STEEL SOCKET HEAD CAP SCREWS OF GRATE OR COVER.
3. FOR APPROVED GRATES AND SOLID COVER SEE STD DWG'S 4-6 & 4-8

FRAME FOR GRATE OR SOLID COVER

CITY OF Lynnwood

8-2003 date

4-5 number

I:\STANDARD_PLANS\STD4-5.DWG